Ready Nixer

ELIMINATE SHORT LOAD FEES

ELIMINATE ORDER MINIMUMS

C ELIMINATE WAIT TIME

readymixer.com

COMPANY PROFILE

 $\bigcirc \bigcirc$

Ready Mixer is a manufacturer of short-load concrete mixing batch plant equipment, including 1-3 yard mixers on trailers, and 3-5 yard mixers on skid rails, hoppers, and wheel loaders, concrete pump trailers, and concrete power trowels.

Founded in 2023, Ready Mixer is a short-loaded concrete manufacturing enterprise dedicated to the R&D, sales, and service of intelligent short-load concrete operations and other concrete equipment applications. The company has developed more than 7 models of equipment that are widely applied in the concrete industry for short-load concrete solutions and other concrete applications.

Fundamentally our company was built to save money on short load fees, minimun order quantities, and kill wait time for concrete with our short load batch system. We have then expanded our product range of concrete equipment to solve other various problems within the industry.

🌐 readymixer.com



TABLE OF CONTENTS

CONCRETE MIXERS ON TRAILERS

CONCRETE SKID RAIL MIXERS

HOPPERS

WHEEL LOADERS

SKID STEERS

CONCRETE PUMP TRAILERS

POWER TROWELS



Concrete Mixer on Trailer

| MODEL | 1 YARD | 1.75 YARD | 3 YARD |
|------------------|--------------------|--------------------|--------------------|
| GEAR REDUCER | Zhier | Zhier | Zhier |
| MOTOR | Honda GX690 | Honda GX690 | Honda GX690 |
| TIRE SIZE | ST235/80/R16 10PLY | ST235/80/R16 10PLY | ST235/80/R16 10PLY |
| HITCH TYPE | 1 7/8 inch | 1 7/8 inch | 1 7/8 inch |
| LENGTH | 16 ft | 16 ft | 19 ft |
| WIDTH | 5 ft | 5 ft 7 in | 6.08 ft |
| HEIGHT | 6 ft 11 in | 7 ft 3 in | 8 ft |
| POUR OPENING | 3 ft | 3 ft | 3 ft |
| BATTERY SIZE | 12 volt 60Ah | 12 volt 60Ah | 12 volt 60Ah |
| GAS TANK SIZE | 2.6 Gallon | 2.6 Gallon | 2.6 Gallon |
| COOLING FAN TYPE | Electric | Electric | Electric |
| DRY WEIGHT | 2,800 lbs | 3,300 lbs | 3,800 lbs |
| GVW WEIGHT | 6,800 lbs | 10,000 lbs | 15,800 lbs |
| WATER TANK SIZE | 50 Gallons | 50 Gallons | 50 Gallons |
| AXEL TYPE | Dual | Dual | Tri |
| | | | ereadymixer.com |

readymixer.com

- > HONDA GX690 MOTOR 22 HP
- **> HYDRAULIC POWERED DRUM**
- **> POUR SHUTE**
- > DUAL LADDERS
- **> WATER TANK AND SPRAYER**


Concrete Mixer on Skid Rails

| MODEL | 3 YARD | 4 YARD | 5 YARD |
|-----------------|--------------------|--------------------|--------------------|
| GEAR REDUCER | Zhier | Zhier | Zhier |
| MOTOR | Honda GX690 | Honda GX690 | Honda GX690 |
| DRUM DIAMETER | 1.47 Yards | 1.69 Yards | 1.69 Yards |
| DRY WEIGHT | 2,458 lbs | 2,678 lbs | 3,031 lbs |
| DRUM THICKNESS | 4 mm | 4 mm | 4 mm |
| LENGHT | 9.6 Feet | 11.5 Feet | 13.25 Feet |
| WIDTH | 4.41 Feet | 5.08 Feet | 5.67 Feet |
| HEIGHT | 5.33 Feet | 5.83 Feet | 7.08 Feet |
| WATER TANK SIZE | 50 Gallon | 50 Gallon | 50 Gallon |
| GAS TANK SIZE | 2.6 Gallon | 2.6 Gallon | 2.6 Gallon |
| POWER TYPE | Gasoline | Gasoline | Gasoline |
| DISCHARGE SPEED | 2 yards per minute | 2 yards per minute | 2 yards per minute |
| | | | |
| | | | |

= sqles@readymixer.com



Hopper

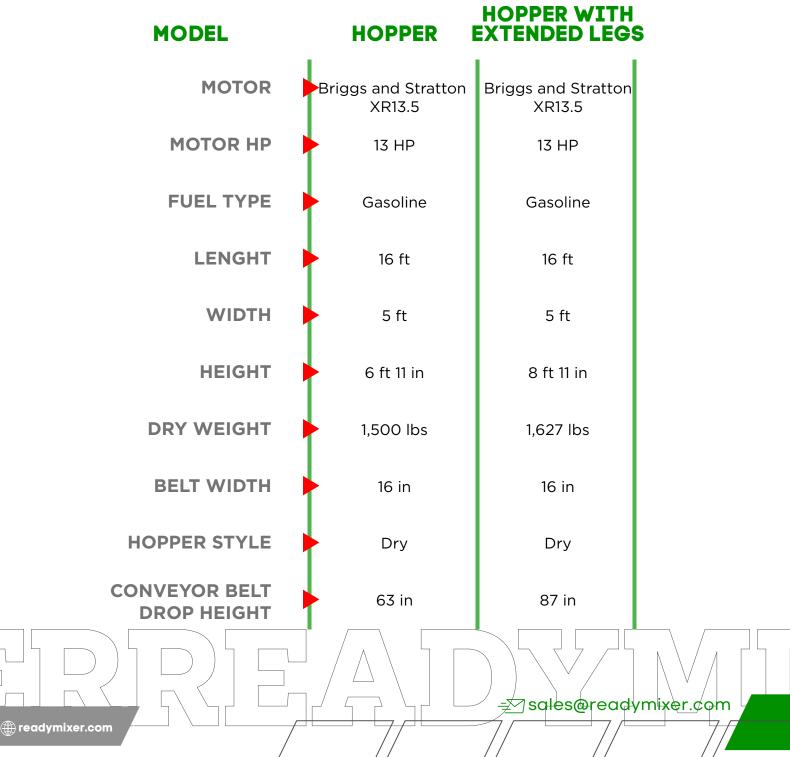

- **> KUBOTA ENGINE 25 HP**
- > HEAT AND AIR CONDITIONER
- > 4 IN <u>1 BUCKET</u>

WHEEL LOADER

- > FORKLIFT ATTACHMENT
- > WEIGHT SCALES INCLUDED

Wheel Loader

MODEL

Ready Mixer

RATED BUCKET CAPACITY 14.13 ft **HOPPER WIDTH** 53.15 ft **RATED LOAD** 1,754 lbs **TOTAL WEIGHT** 5,584 lbs **ENGINE TYPE** Kubota **POWER OF ENGINE** 24.65 HP **DUMPING HEIGHT** 90.55 in **DUMPING REACH** 27.17 in MINIMUM GROUND CLEARNACE 8.66 in MINIMUM TURNING 189 in UNLOADING ANGLE 37 degrees TIRE 31 - 15.5 - 15 **DISTANCE BETWEEN AXLES** 75 in **DISTANCE BETWEEN WHEELS** 45.28 in TRANSMISSION ASSEMBLY 240

= sqles@readymixer.com

- **> KUBOTA 1505 ENGINE**
- > 4 IN 1 BUCKET
- > 8 FEET LIFT HEIGHT
- > DIESEL POWERED
- **> 7 CUBIC FEET BUCKET CAPACITY**


Skid Steer

SKID STEER

MODEL

Ready Mixer

SOE

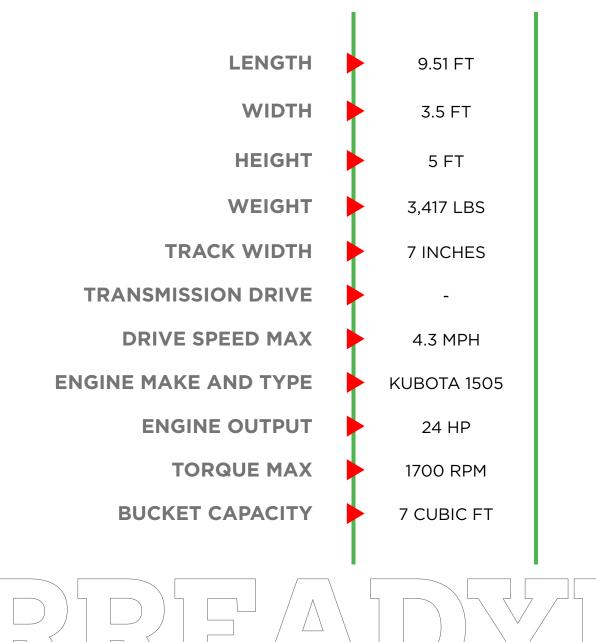

= sqles@readymixer.com



- > REMOTE CONTROL OPERATIONS
- 39 YARD POR HOUR PRODUCTION RATE
- **> S TUBE CONCRETE VALVE**

Concrete Pump Trailer

MODEL

LENGTH WIDTH **HEIGHT WEIGHT AXLE TYPE AXLE CAPACITY RATING TIRES BRAKES OUTRIGGER LEGS REMOTE CONTROL CONCRETE OUTPUT CONCRETE VALVE TYPE** MAXIMUM AGGREGATE SIZE **DELIVERY CYLINDERS DELIVERY PRESSURE** STROKE STROKE/MIN HOPPER CAPACITY **OUTLET DIAMETER HYDRAULIC SYSTEM** HYDRAULIC TANK CAPACITY **ENGINE TYPE**

ENGINE POWER

FUEL TANK

HORNET C75HP 14.25 FT 7.5 FT 7.25 FT 7,251 LBS Dual 8,800 LBS ST195/75 R17.5 Electric Manual Standard Yes 39 yards per hour S Tube 1.5 INCH 5.5 INCH 290 PSI 33 INCH 32.5 10 CU FT 5 INCH **Open Loop** 44 gallons Diesel Tier 4 F Cummins QSF2. 8FR99295 75 HP


21 GALLONS

= sqles@readymixer.com



- > 24 48 INCH DIAMETER
- **VARIABLE SPEED**
- **> FLOAT PANS INCLUDED**
- > 4 COMBINATION BLADES

Gator Concrete Power Trowels

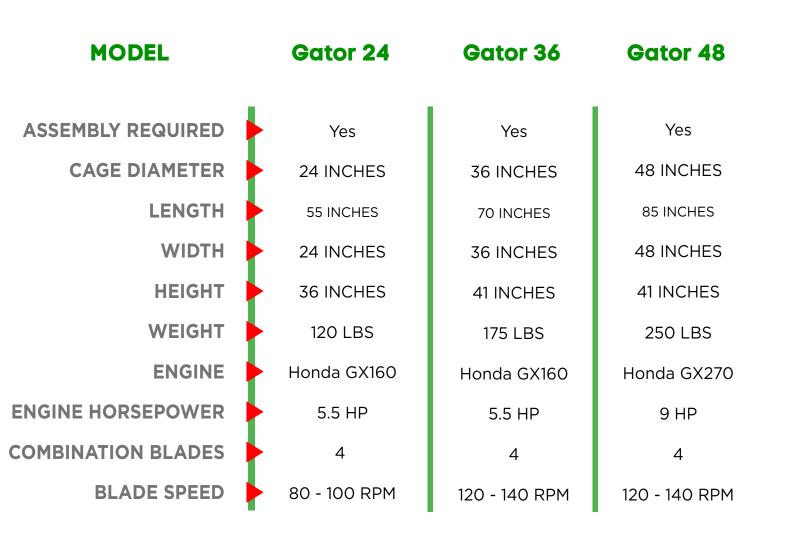



Contact US



sales@readymixer.com =



readymixer.com

